




Alapin Gasket Material



Compressed Fibre Gasket Sheets



PTFE Based Gasket Materials



Premium Rubber Gaskets and Sheets



Gasket Cutting Tools and Accessories


AG Sydney
Head Office
02 9774 3333

syd@agaus.com.au

A high quality, high pressure, general purpose gasket material that can be used in a broad range of sealing applications.

This material can be used with water, steam, oils, gases, hydrocarbons, lubricants, fuels, alcohols and moderate organic and inorganic acids as well as most other media types.

Alapin is manufactured from a combination of DuPont Kevlar fibres, minerals and an NBR rubber binder. It withstands elevated temperatures up to 340°C (non-steam) and pressures up to 12 MPa.

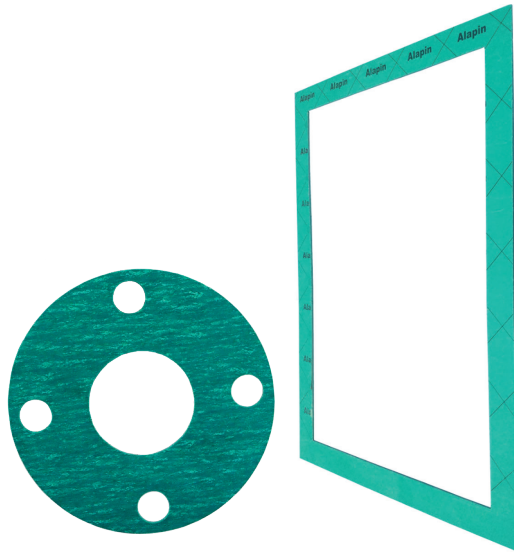

Key Specifications

Key Specifications	
Construction	Aramid, Mineral, NBR
Max. Temperature	340°C*
Max. Pressure	12 MPa 1,740 psi
Compressibility	10.6%
Creep Relaxation	20%
Density	1.6 g/cm ³
ASME-Code Sealing Factors (2mm Thick)	
Y =	2.5 MPa
M =	5.5 MPa

Standrd Sizes

Standrd Sizes	
Standard Thicknesses:	0.8mm, 1mm, 1.5mm, 2mm, 2.5mm, 3mm, 5mm
Maximum Sheet Size:	1550mm x 3100mm

Other sizes and thicknesses available on request.

For custom sheets, cut gaskets, pricing, availability and more information; please do contact your local Associated Gaskets Branch.

AG Queensland

07 3257 1144

bris@agaus.com.au

AG Victoria

03 9768 3113

melb@agaus.com.au

AG Western Australia

08 9258 5858

perth@agaus.com.au

AG Newcastle

02 4967 7677

new@agaus.com.au

AG Wollongong

02 4272 4800

woll@agaus.com.au

Visit agaus.com.au for more information and full contact details.