





FRAS Rubber, Black, 65 Duro




Sponge & Foam
Sealing Tapes



Rubberised
Sponge & Foam
Gasket Sheets



Rubber Sheets



Rubber &
Sponge
Extrusions

AG Sydney
Head Office
02 9774 3333

syd@agaus.com.au

A premium grade of rubber suitable for use in applications where ignition points and fire potential are deemed to be high risk.


This tough and durable rubber is often used for the manufacture of conveyor curtains and skirting, belt scrapers and gaskets.

Fire Resistant, Anti-Static Rubber is commonly used in underground mining applications.

FRAS rubber displays good resistance to heat (typically used in applications between -25°C and 90°C) and ozone.

This premium grade of rubber also exhibits good resistance to abrasion and a high tear strength. Consisting of a specialised formulation of SBR (Styrene Butadiene Rubber), our standard grade of FRAS is typically 65 Duro in hardness (Shore A, ± 5) though other hardnesses can be provided upon request.

Our FRAS Rubber is certified to MDG 3006 MTR8 3.2 (2007) and MDG 3608 3.3 (2012).

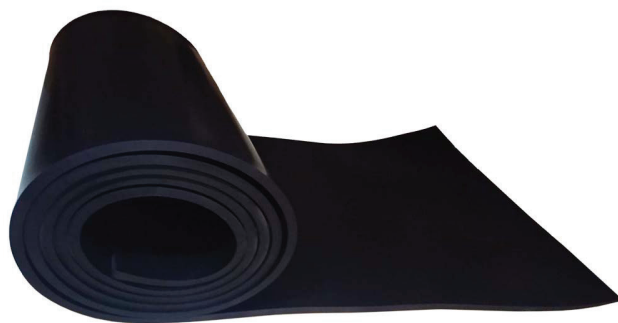

Key Specifications

Temperature Range	-25°C to +90°C
Specific Gravity	1.28
Hardness	65 Shore A
Tensile Strength	14 MPa (min.)
Max. Elongation	300% (min.)

Standard Thicknesses

1.5mm	3mm	4.5mm	6mm
9mm	12mm	15mm	19mm

1.5mm Thick is 1200mm Wide

All Other Thicknesses are 1500mm Wide.

Cut Parts and Strip Available on Request.

AG Queensland

07 3257 1144

bris@agaus.com.au

AG Victoria

03 9768 3113

melb@agaus.com.au

AG Western Australia

08 9258 5858

perth@agaus.com.au

AG Newcastle

02 4967 7677

new@agaus.com.au

AG Wollongong

02 4272 4800

woll@agaus.com.au

Visit agaus.com.au for more information and full contact details.