


Marigold 3000G Packing

Service : Rotating & Static
Application : Pumps & Valves
Product Type : Braided Packing
Material : Acrylic Blended Fibres

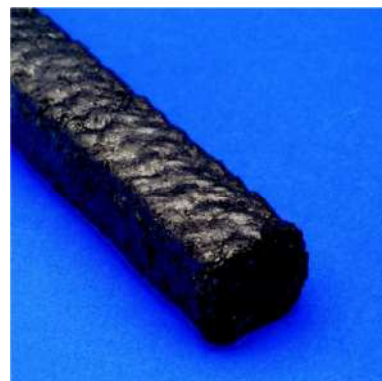

Description

Braided from continuous Acrylic blended fibre, Marigold 3000G is impregnated with a proprietary high temperature lubricant, and pre and post lubricated with high purity graphite flake. The unique lubrication process ensures a dense but flexible general service packing, which can be used in most steam, water, salt water, oil, and mild acid or alkali applications. Marigold 3000G is a general service packing suitable for moderate pump and valve service.

Construction : Interlock Braid
Temperature Rating : 260°C
pH Range : 4 - 10
Shaft Speed Rating : 5.1 mps / 1000 fpm
Pressure Rating : 20.7 bar / 300 psi

Applications

Rotary, and Reciprocating Pumps, as well as Valve Service or other Static applications

Chemical Resistance

Suitable for: - Mild Acids & Alkalis; Air - Dry Industrial; Ammonia Gas; Steam; Water;
Salt Water/Brine; Petroleum & Synthetic Oils

Yield Information*

SQ. Section	3.2 mm	4.8 mm	6.4 mm	8 mm	9.5 mm	12.7 mm	16 mm	19 mm	22 mm	25.4 mm
Metres / kg	60.9	35.7	26.1	15.4	9.0	6.4	4.1	2.8	2.0	1.6

*Yields are subject to deviation due to industry accepted tolerance and density variations



Phone: 1300 098 060

Web: www.agaus.com.au

REV: 1-2-2006

1120R30813AGDOCg

THIS INFORMATION SHOULD NOT BE TREATED AS A SUBSTITUTE FOR SPECIFIC TECHNICAL ADVICE.
ASSOCIATED GASKETS DOES NOT GIVE SUCH ADVICE & CANNOT WARRANT THE PERFORMANCE OR
SUITABILITY OF PRODUCTS FOR PARTICULAR APPLICATIONS.

Associated Gaskets Pty Ltd providing Quality first solutions