




Associated Gaskets



Standard Sizes

Width	Thickness	Length
6mm	0.065mm	33Mtrs
9mm	0.065mm	33Mtrs
12mm	0.065mm	33Mtrs
15mm	0.065mm	33Mtrs
18mm	0.065mm	33Mtrs
21mm	0.065mm	33Mtrs
24mm	0.065mm	33Mtrs

AG slits all of our rolls of KA00H using our own slitting facilities. This means that if one of the standard widths listed above won't suit your application, custom widths can be slit quickly and with no minimum order quantity. Contact AG today for more information on available sizes.

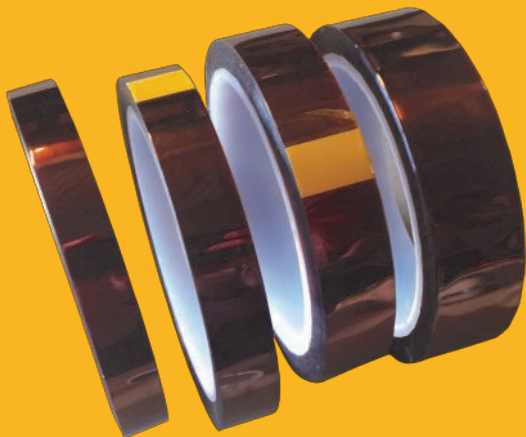

KA00H Adhesive Polyimide Tape

AG's KA00H Adhesive Polyimide film tape is a high performance electrical insulation tape used in elevated temperature environments. This tape is manufactured from a combination of 0.025mm thick polyimide film coated with a silicon based thermosetting pressure sensitive adhesive on one side. The finished, UL recognised, tape displays high conformability and high mechanical strength for easy application.

KA00H is typically used in the insulation of high temperature coils for electric motors and as general insulation in generators, capacitors and transformers. It can also be used for masking gold contacts on PC boards during wave soldering and hot air levelling or as a masking tape for high temperature environments.

KA00H Adhesive Polyimide Film Tape is used in electrical applications with temperatures ranging up to 200°C.

For more information on this economical grade of adhesive electrical tape, or any other tape in AG's comprehensive range, please don't hesitate to contact your local Associated Gaskets branch.



Brisbane: 07 3257 1144
Melbourne: 03 9768 3113
Newcastle: 02 4967 7677

Associated Gaskets

Phone: 1300 098 060
Web: www.agaus.com.au

Perth: 08 9258 5858
Sydney: 02 9774 3333
Wollongong: 02 4272 4800