


Marigold 300 Packing

Service : Rotating & Static
Application : Pumps & Valves
Product Type : Braided Packing
Material : Aramid Filament

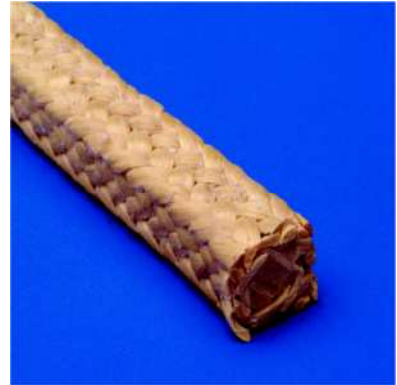

Description

Marigold 300 is braided from continuous Aramid filament and impregnated with PTFE and a proprietary inert lubricant. The unique braiding style ensures a dense, resilient packing which is easy to cut and install with the added advantage of excellent braid retention.

Style 300 is non-staining and non-contaminating with excellent heat dissipation properties. The high tensile strength of the Aramid fibres makes this packing ideally suited for slurry or any abrasive service where the media is highly aggressive.

Construction : Interlock Braid
Temperature Rating : 260°C
pH Range : 2 - 12
Shaft Speed Rating : 11.2 mps / 2200 fpm
Pressure Rating : 34.5 bar / 500 psi

Applications

Centrifugal, Rotary, and Reciprocating Pumps, as well as Valve Service and other static applications

Chemical Resistance

Suitable for: - Mild Acids & Alkalis; Dry Industrial Air; Ammonia Gas; Water; Steam;
Salt Water/Brine; Petroleum & Synthetic Oils; Aliphatic & Aromatic Solvents

Yield Information*

SQ. Section	3.2 mm	4.8 mm	6.4 mm	8 mm	9.5 mm	12.7 mm	16 mm	19 mm	22 mm	25.4 mm
Metres / kg	61.0	29.5	16.1	10.2	7.4	4.4	2.8	1.8	1.4	1.15

*Yields are subject to deviation due to industry accepted tolerance and density variations



Phone: 1300 098 060

Web: www.agaus.com.au

REV: 20-1-2006

1100R40813AGDOCg

THIS INFORMATION SHOULD NOT BE TREATED AS A SUBSTITUTE FOR SPECIFIC TECHNICAL ADVICE. ASSOCIATED GASKETS DOES NOT GIVE SUCH ADVICE & CANNOT WARRANT THE PERFORMANCE OR SUITABILITY OF PRODUCTS FOR PARTICULAR APPLICATIONS.

Associated Gaskets Pty Ltd providing Quality first solutions