



Gylon 3510 Gasket Material



Compressed Fibre Gasket Sheets



Filled PTFE Gaskets and Sheet



Premium Rubber Gaskets and Sheets



Gasket Cutting Tools and Accessories

AG Sydney
Head Office
02 9774 3333

syd@agaus.com.au

A premium grade gasket sheet that offers superior performance over conventional PTFE providing a tight seal with reduced emissions and excellent bolt torque retention.


Will withstand attack from an extremely wide range of chemicals such as strong caustics and toxic chemicals like chlorine and ammonia while providing long lasting seal performance across a wide operating temperature range.

Manufactured in the USA from a combination of barium sulfate and PTFE, Gylon 3510 is certified for food grade applications by the FDA.




Standrd Sizes	
Standard Thicknesses:	0.8mm 1.5mm & 3mm
Maximum Sheet Size:	1500mm x 2286mm

Other sizes and thicknesses available on request.

For custom sheets, cut gaskets, pricing, availability and more information; please do contact your local Associated Gaskets Branch.

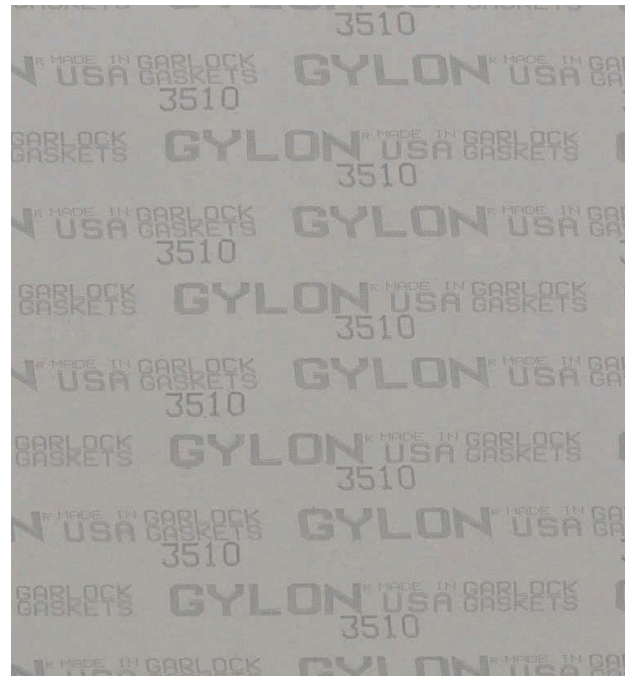

Key Specifications	
Construction	PTFE w/ barium sulfate
Max. Temperature	260°C
Min. Temperature	-268°C
Max. Pressure	83 bar 1200 psi
Compressibility	4% - 10%
Recovery	40%
Creep Relaxation	11%
Density	2.8 g/cm ³

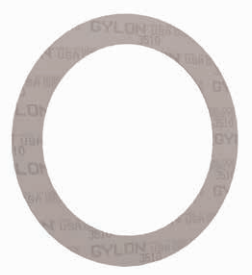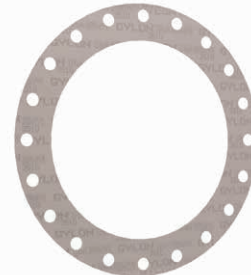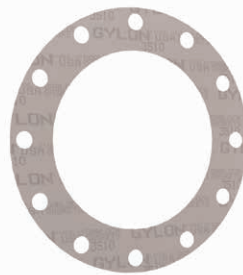

AG Queensland

07 3257 1144

bris@agaus.com.au

AG Victoria

03 9768 3113

melb@agaus.com.au

AG Western Australia

08 9258 5858

perth@agaus.com.au

AG Newcastle

02 4967 7677

new@agaus.com.au

AG Wollongong

02 4272 4800

woll@agaus.com.au

Visit agaus.com.au for more information and full contact details.